
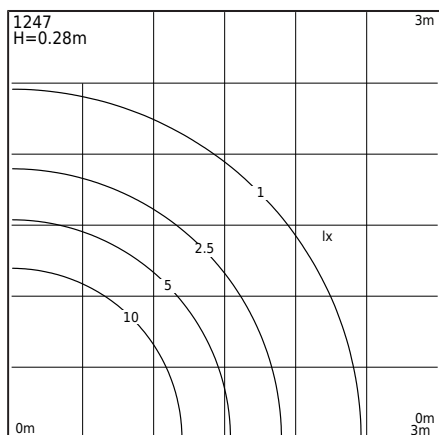
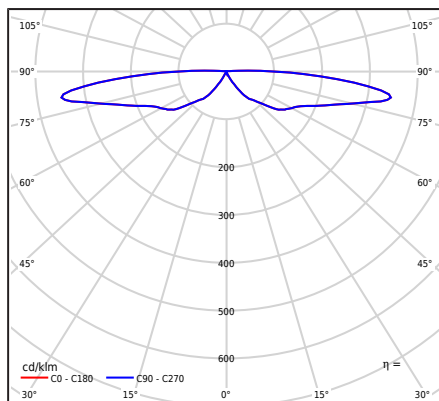


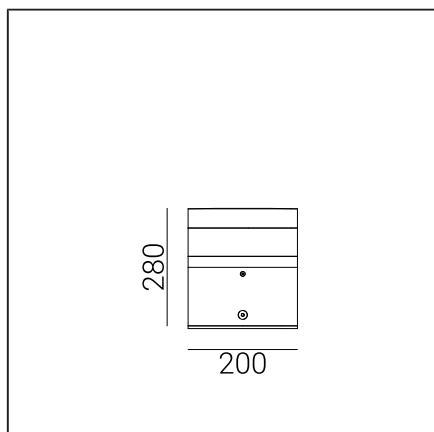

Art	E-nr	Färg	RAL
1247AL	7747379	ALUMINIUM	9006
1247GR	7747380	GRAFIT	7016

Allmän information

Typ armatur	Pollare
Material	Pulverlackerad aluminium
Diffuser/Avskärmning:	Klart polykarbonat, UV stabiliserat
Typ ljuskälla	LED modul + driver
Ljusstyrning	Bakkantsdimmer
Netto / Bruttovikt armatur	4,84kg / 5,64kg
Förpackning mått [cm]	22,5x22,5x37
LED	Cree DK1305003 V2 XPG3 3K (Ø Produktblad)
Drivdon	Philips Xitanium 7W 0,35A 20V TE SC 230V (Ø Produktblad)
Led modul effekt	6,6W
Armatur effekt	8,4W
Lumen modul	854lm
Lumen ut	312lm
Led modul effekt	129,4lm/W
Armaturens effekt	37,1lm/W
Färgtemperatur	3000K
Färgbeständighet (McAdam ellipse)	SDCM3
Färgtolkningsindex (CRI/Ra)	80
Nominell livstid L70/B50 vid 25°C	>145 000h
LED-fotobiologiskt hot	RG0 or RG1
Energieffektivitetsindex (EEI)	A / EPREL
Effektfaktor	PF 0,98
THD-faktor	< 20%
Ta nominel:	+25°C
Maximal omgivningstemperatur	+45°C
Inrush current	1A/15,2µs

Filer som kan laddas ned

Photometric LDT files, Photometric IES files, Manualer